

# Digital Battery Element Testers

## Pulse Surge Arc Testing of Lead-Acid Batteries

# 1657



### Key Benefits

- Improve product quality and customer satisfaction
- Short test times to support high volume production test
- Simple user interface for ease of operation and reduced training cost
- Large, easy to read color LCD with white LED back-light and audible alarm provides clear Pass/Fail indications
- Digital computer interfaces for data collection for statistical process control
- Detachable Safety Probes with self-retracting tips ensure operator safety and easy replacement as needed
- Form and fit compatible with STS 1652 Model
- Bench Model or Rack Mount Models available

**Also Available in  
19" Rack Mount  
Form Factor**



# 1656



## General Description

The STS Instruments 1656 & 1657 Battery Element Tester provides a unique method for the detection of assembly level insulation defects in lead-acid batteries, including missing and damaged separators. Detection of such faults prior to filling and charging the battery minimizes costly reclamation.

## Important Benefits

Increase your product quality and reliability by rigorous in-line high voltage testing of your battery element separator plates during the production process. Reduce field failures, costly recalls and dissatisfied customers by adding the 1657 Battery Element Tester to your Lead Acid Battery production line.

Hidden imperfections in your separator plates are difficult to detect using conventional means. When using traditional AC hi-pot testing to detect such failures, excessive heating can occur in moist cell applications resulting in possible damage of the unit under test.

The 1657 uses a unique short-duration high voltage pulse instead which maximizes stress on the dielectric material for fault detection but induces minimal energy.

## Advanced Technology


The STS Instruments Battery Element Tester uses modern digital technology to obtain new levels of accuracy and fault detection compared to previous generation, analog battery element testers. Sporting an easy to read full color display and simple menu driven user interface, the 1656 and 1657 represent a significant step forward in ease of use.

Both models offer fully adjustable test voltage with a peak output capability of 3000 volts, accommodating a wide range of separator spacings and types. Durable solid state switching of the high voltage output assures reliability for high volume applications.

Easy-to-read readouts for applied test voltage and quality reading make this unit very operator friendly, requiring minimal training and setup. Operation is go/no-go, and requires no operator interpretation of results. The test voltage is applied using included safety probes. When a failure occurs, the high voltage is shut off and both audible and visual alarms warn the operator of any failure.

## APPLICATIONS

- **Automotive Engine Starting, Lighting and Ignition Batteries (SLI)**
- **Power Backup and Energy Storage System Batteries**
- **Traction Application Batteries**
- **Most Battery Types with Separators**

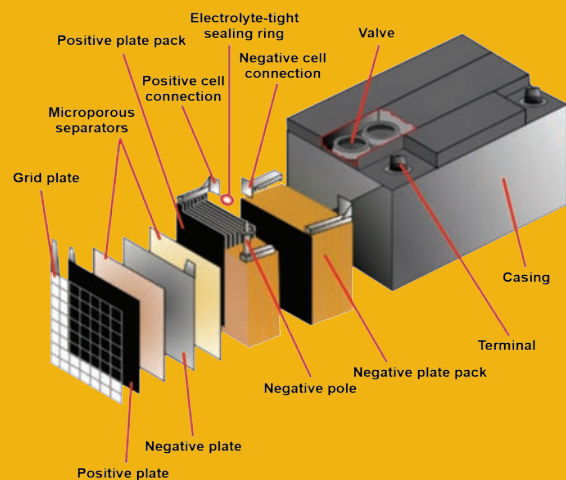

## Easy Front Panel Operation


The Battery Element testers use a large color LCD in combination with a simple key pad and on-screen menus to guide the operator through setup and test.

Menu selection is achieved by pressing the MENU key, scrolling through available menu items with the rotary knob and pressing it to make a selection. Any parameters can be entering with the knob as well.

A set of three TEST PRESETS is available for quick recall using the VOLT and TRIP Hi/Lo Limit Keys.


The set of High Voltage Test Probes included uses auto-retracting tips for operator safety. During testing, an audible fail signal is generated if the test result is outside the preset pass limits.

For automated test systems, the PLC interface or either USB, RS232 or RS485 interface may be used.

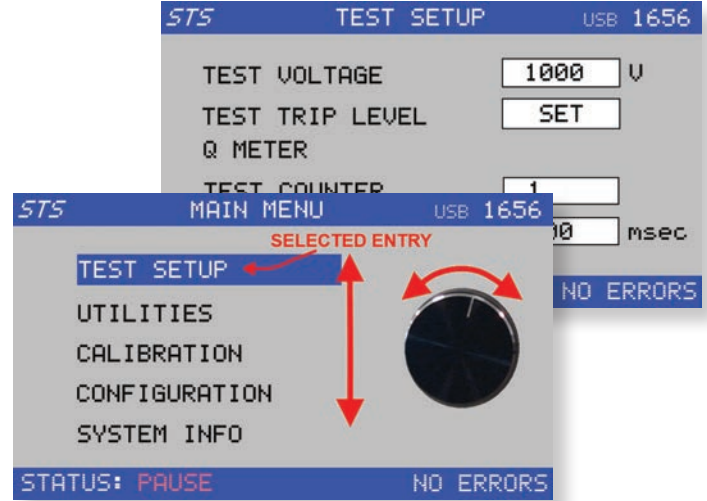


MENU Driven Front Panel Operation

## Model 1657

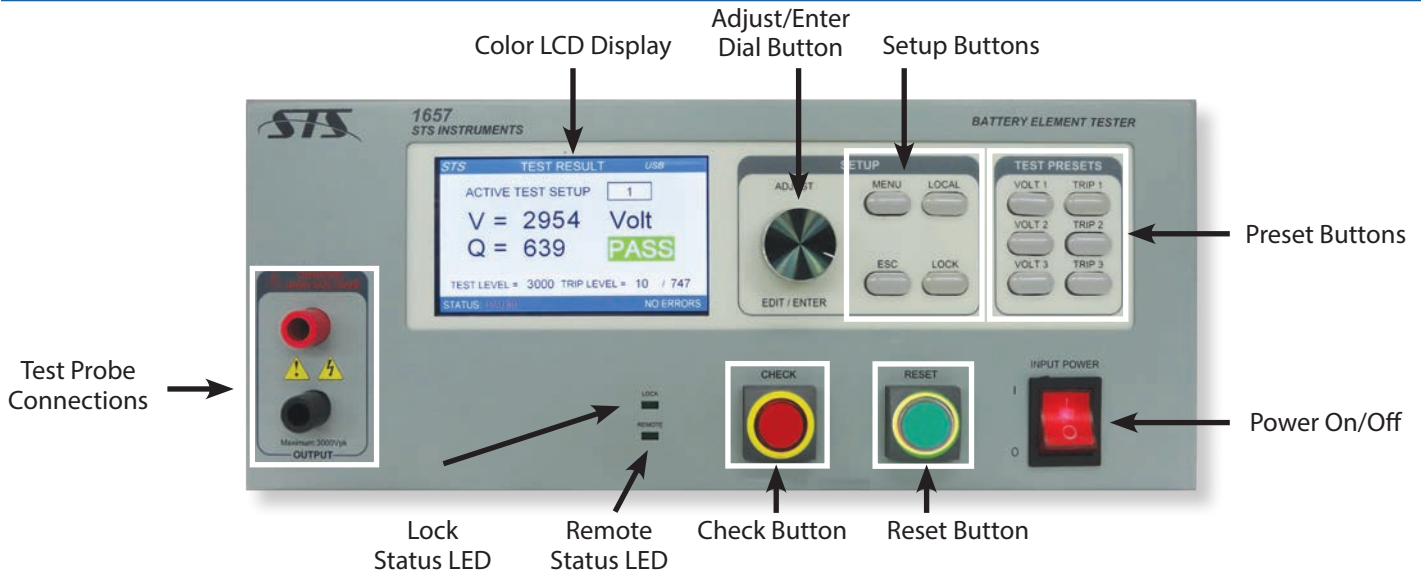

## Model 1656

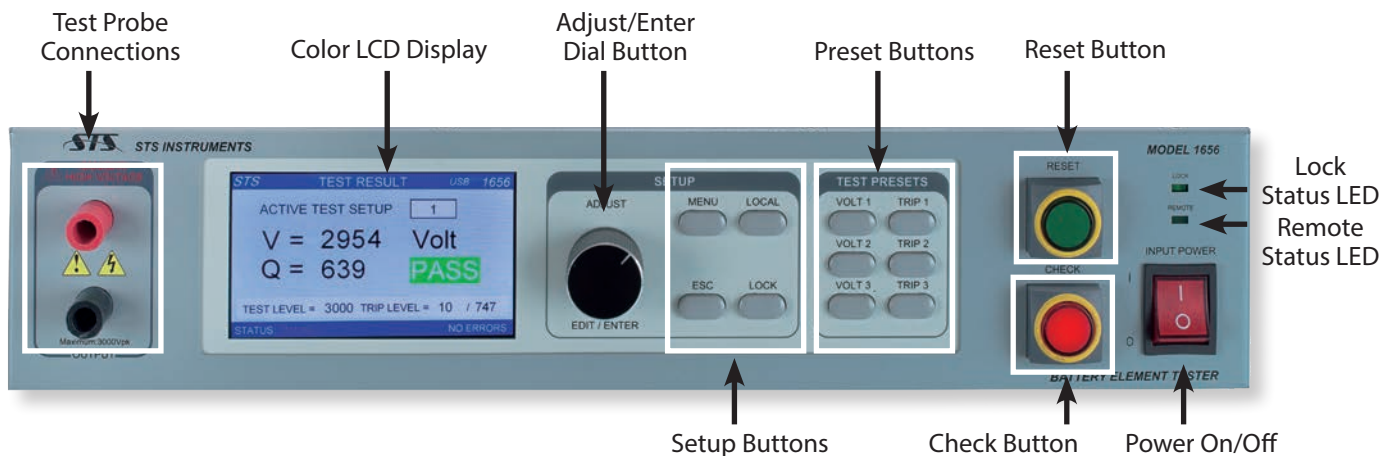

## Technical Specifications

### OUTPUT VOLTAGE

|                      |  |
|----------------------|--|
| <b>RANGE</b>         | 300 to 3000 Volts                      |
| <b>RESOLUTION</b>    | 10 V                                   |
| <b>ACCURACY</b>      | ± 2.0%                                 |
| <b>SHAPE</b>         | Pulse                                  |
| <b>DURATION</b>      | 120 µsec typ.                          |
| <b>TEST INTERVAL</b> | Programmable from 30 msec to 5000 msec |

### MEASUREMENTS (ALL DIGITAL)

|                      |                             |
|----------------------|-----------------------------|
| <b>VOLTAGE</b>       | Range: 0 to 3000 Volts Peak |
|                      | Resolution: 1 Volt          |
|                      | Accuracy: ± 2.0% F.S.       |
| <b>QUALITY METER</b> | Range: 10 to 3750           |
|                      | Resolution: 1               |
|                      | Accuracy: ± 2.0%            |

### AC INPUT

|                      |  |
|----------------------|--|
| <b>INPUT VOLTAGE</b> | 100V to 240V ± 10 % Universal Input, 47 – 63 Hz      |
| <b>CURRENT</b>       | 500 mA Max.  |
| <b>POWER FACTOR</b>  | 0.98 Typical   |
| <b>FUSE</b>          | 0.5A Slow Blow 250VAC.                               |
|                      | Fuse Dimension: 5 x 20 mm / 0.20" x 0.80"            |
| <b>LINE CORD</b>     | Detachable, IEC 60320, C13 Type (Line Cord Included) |

### ENVIRONMENTAL

|                                |                                |
|--------------------------------|--------------------------------|
| <b>TEMPERATURE (Operating)</b> | 0 to +40° C<br>+32 to +104° F  |
| <b>TEMPERATURE (Storage)</b>   | -20 to +70° C<br>-2 to +158° F |
| <b>HUMIDITY</b>                | RH 5 to 95%, Non-Condensing    |
| <b>ALTITUDE</b>                | 2000 m / 6000 ft.              |
| <b>POLLUTION DEG.</b>          | Cat II, Indoor Use             |

### REMOTE CONTROL

|                                   |   |
|-----------------------------------|---|
| <b>USB (standard)</b>             | USB: 2.0, Type B Connector, Rear Panel          |
| <b>RS232 (option)<sup>1</sup></b> | DB9 Connector, Rear Panel                       |
| <b>RS485 (option)<sup>1</sup></b> | DB9 Connector, Rear Panel                       |
| <b>PLC I/O (option)</b>           | Digital I/O, D-Sub 15 pin connector, Rear Panel |

### REGULATORY

|                  |                                  |
|------------------|----------------------------------|
| <b>APPROVALS</b> | CE Mark LVD 2006/95/EC           |
|                  | Safety: IEC 61010-1:2010, Ed 3.0 |
|                  | EMC: IEC 61326-1:2013, Ed. 2.0   |

Note 1: Options -232 and -485 are mutually exclusive. Only one of these can be specified on order.

### FRONT PANEL CONTROLS AND INDICATORS

|  |  |
|--|--|
| <b>POWER</b>                           | Illuminated On/Off Rocker Power Switch<br>Lit when unit is powered on                                |
| <b>CHECK</b>                           | Red Illuminated Check Button Verifies Tester Operation   |
| <b>RESET</b>                           | Green Illuminated Reset Button   |
| <b>ADJUST / ENTER DIAL</b>             | Allows for Easy Scrolling through on Screen Menu Fields and Adjustment of Parameters and Test Levels |
| <b>LCD DISPLAY</b>                     | 480 x 272 Pixel High Resolution Graphical Color LCD with white LED Back-lit, 4.2" Diagonal Size      |
| <b>KEYS</b>                            | MENU: Displays Main Menu   |
|  | LOCAL: Returns Front Panel Control   |
|  | ESC: Backs up or Undo Last Entry   |
|  | LOCK: Locks out Front Panel Control  |
|  | VOLT1 to VOLT3: Selects Preset Test Level  |
| TRIP1 to TRIP3: Sets Preset Trip Level |  |
| <b>TERMINALS</b>                       | Range: 0 – 3000 V<br>Safety Rated: 6000V max.  |
| <b>TEST PROBES</b>                     | High Voltage Detachable Probes with Leads  |
|  | Safety Retractable Probe Tips  |
|  | Easily Replaceable after Wear  |

### PHYSICAL

| MODEL                         | 1656                               | 1657  |
|-------------------------------|------------------------------------|---|
| <b>FORM FACTOR</b>            | 19" Rack mount<br>Steel Chassis    | Bench Top<br>Steel Chassis                  |
| <b>DIMENSIONS<sup>2</sup></b> | W: 426 mm / 16.75"                 | W: 340 mm / 13.4"                           |
|                               | H: 89 mm / 3.5"                    | H: 140 mm / 5.5"                            |
|                               | D: 254 mm / 10.0"                  | D: 336 mm / 13.2"                           |
| <b>Shipping:</b>              | 559 x 152 x 356 mm<br>22 x 6 x 14" | 470 x 275 x 497 mm<br>18.5" x 10.8" x 19.6" |
| <b>WEIGHT Shipping:</b>       | Net: 6.8 Kg / 15 lbs.              | Net: 6.7 Kg / 14.8 lbs.                     |
|                               | 9 Kg / 20 lbs.                     | 8.2 Kg / 18 lbs.                            |


### FEATURE COMPARISON 1652 VERSUS 1656 / 1657

| Feature                          | 1652 | 1656 / 1657       |
|----------------------------------|------|-------------------|
| <b>Test for SHORTS</b>           | YES  | YES               |
| <b>Test for OPENS</b>            | NO   | YES               |
| <b>Front Panel Setups</b>        | NO   | YES               |
| <b>Large Color LCD Display</b>   | NO   | YES               |
| <b>Remote Control Interfaces</b> | NO   | USB, RS232, RS485 |
| <b>Programmable Test Time</b>    | NO   | YES               |
| <b>Calibration Reminder</b>      | NO   | YES               |
| <b>PLC Interface</b>             | NO   | YES               |
| <b>Multi-Language Support</b>    | NO   | YES               |



## Front and Rear Panel Layout and Connectors

### Model 1657

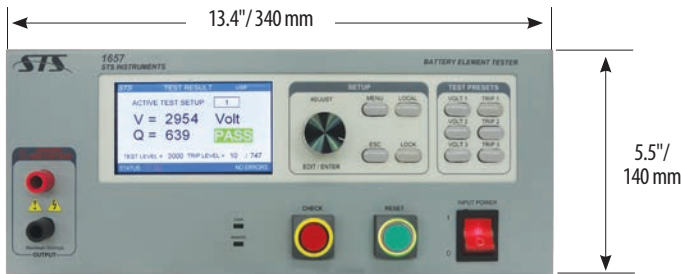


The STS 1657 is designed for bench top use.



The STS 1657 Rear Panel provides connections for AC Input, USB interface, PLC I/O and RS232 interface option.

### Model 1656

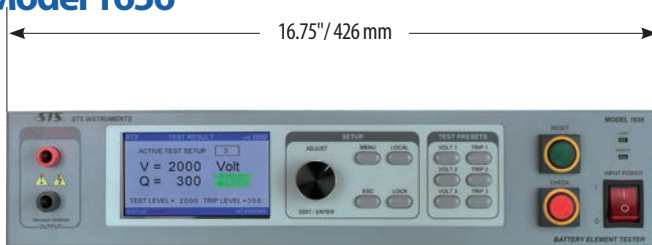

The STS 1656 is designed for bench top or 19\"/>




The STS 1656 Rear Panel provides connections for AC Input, USB interface, PLC I/O and RS232 interface option.

## Auto Line Probe Switch Matrix Option


- Increased Lead-Acid Battery Quality
- Supports High-Speed Automated Production Lines
- Shorten Test Times by Testing Six Cells per Test Cycle
- Tests Up To Six Cells per Battery every 1.2 seconds
- Interfaces with PLC Controllers
- Remote computer interfaces for data collection and control

The STS Instruments 1656 Auto-Line Option is a companion product to the Model 1656 or 1657 Battery Element Tester. When combined with either battery element tester (BET) model, the Auto-Line option provides automated testing of batteries with up to six elements using automated probing systems. The Auto-Line routes test signal and measurements to up to six available channels under control of the BET. All high voltage connections are made at the rear panel of the Auto-Line unit and routed to the multi-channel test head (not included with Auto-Line option).

## 1656 Auto Line Option Front and Rear Panel Layout and Connectors

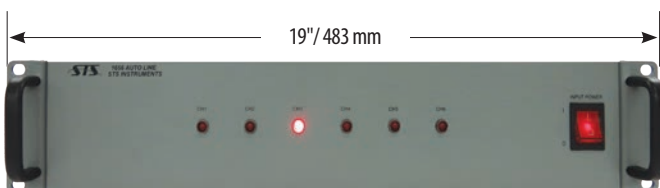

The STS Auto-Line option is designed for bench top or 19\"/>

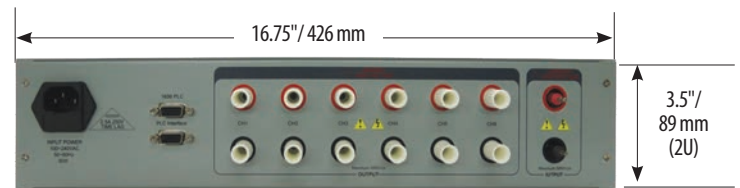

The STS Auto-Line Option Rear Panel provides connections High Voltage Leads, Control interface and AC Line input.



## Ordering Information

| MODEL NUMBER                      | DESCRIPTION  | NOTES  |
|-----------------------------------|--|--|
| <b>STANDARD MODELS</b>            |  |  |
| 1656-PLC<br>1657-PLC              | Battery Element Tester (BET)   | Supplied with: <ul style="list-style-type: none"> <li>• USB Interface, PLC I/O</li> <li>• Set of High Voltage Safety Test Leads, 1.8 m / 6 ft. long</li> <li>• Operator Manual and Owners Manual</li> <li>• Spare AC Input Fuses (2)</li> <li>• Certificate of Calibration</li> <li>• AC Line Cord (detachable)</li> </ul> |
| 1656-PLC-232<br>1657-PLC-232      | BET with RS232 Serial Interface                                      | • Adds RS232 Interface in addition to USB  |
| 1656-PLC-485<br>1657-PLC-485      | BET with RS485 Serial Interface                                      | • Adds RS485 multi-drop Interface in addition to USB   |
| 1656-PLC-RPC<br>1657-PLC-RPC      | BET with Rear Panel HV Connect                                       | • Provides rear panel mounted test probe connections   |
| <b>AUTO LINE UNIT</b>             |  |  |
| 1656 AUTO LINE                    | Six Channel HV Multiplexer for auto-production line fixture testing. | Requires 1656-PLC-RPC or 1657-PLC-RPC<br>Supplied with: <ul style="list-style-type: none"> <li>• Auto Line Operator Manual</li> <li>• AC Line Cord (detachable)</li> </ul>   |
| <b>1652 COMPATIBILITY OPTIONS</b> |  |  |
| 1657-PLC-TT                       | Adds TT1652 Option   | Modifies PLC Test Input to emulate 1652 Trigger mode. See TT1652 Data sheet for details.   |
| 1657-PLC-070                      | BET with Model 070 Adapter attached to top cover                     | Designed to replace 1652-070 field units. Attaches 995-017-907B module adapter to 1657-PLC-TT BET  |
| Type 070 Adapter                  | P/N 995-017-907B for use with 1657-PLC-TT                            | Converts 115Vac to isolated low level PLC Test input signal and provides 115Vac Test Fail output. May be ordered separately. Requires 1657-PLC-TT BET to operate. See Type 070 Data sheet for details.   |
| <b>ACCESSORIES (P/N)</b>          |  | <b>DESCRIPTION</b>   |
| 102-050-919                       | Test Probe Assembly Kit 1.8 m / 6 ft. long                           |  |
| 200025                            | Test Probe Assembly, <b>Red</b> , 1.8 m / 6 ft. long                 |  |
| 200026                            | Test Probe Assembly, <b>Black</b> , 1.8 m / 6 ft. long               |  |
| 200386                            | Test Probe Assembly, <b>Red</b> , 3 m / 10 ft. long                  |  |
| 200387                            | Test Probe Assembly, <b>Black</b> , 3 m / 10 ft. long                |  |



102-050-919  
BET High Voltage  
Probe Kit

## Service and Support

STS Instruments' customer support is second to none. Our Customer Support Program provides the training, repair, calibration, and technical support services that our customers value. So, in addition to receiving the right test equipment, our customers can also count on excellent support before, during and after the sale.

For customers with many Battery Element Testers, a portable calibration station is available. See the STS1600CS data sheet for details.



STS 1600CS Portable Calibration Station

## Product Warranty

Warranty Period: One year. Complete calibration and repair services are offered at our USA, United Kingdom and China manufacturing facilities (see contact info below). Calibrations are to original factory specifications and are traceable to NIST (National Institute of Standards and Technology). A certificate of conformance accompanies each repaired tester.



**STS Instruments, Inc.**  
17711 Mitchell North, Irvine, CA 92614  
Website: [www.stsinstruments.com](http://www.stsinstruments.com)  
Email: [info@stsinstruments.com](mailto:info@stsinstruments.com)  
Toll Free: 800-421-1921  
Tel: 580-223-47333  
Fax: 580-226-57527